



Berner Fachhochschule
Haute école spécialisée bernoise
Bern University of Applied Sciences

CS Basics 3.2) Linux

E. Benoist & C. Grothoff
Fall Term 2018-19

Linux

- Linux
 - Presentation
- Shell
 - Main Functionalities
 - Rights Management
 - Install software
- Conclusion

Linux

Presentation

Linux

▶ **Unix Family**

- ▶ Multi-task and multi-user Operating Systems
- ▶ First version in 1969
- ▶ Very popular for servers in the 1980s
- ▶ Many different versions:
FreeBSD, NetBSD, OpenBSD, Solaris, OSX, iOS, GNU/Linux
et Dalvik/Linux (Android).

▶ **Linux** (or GNU Linux)

- ▶ Free and Open Source Operating System
- ▶ Multitask and Multiuser
- ▶ Kernel was developed by Linus Torvald in 1991
- ▶ Free software, source code is available
- ▶ Available in different distributions
Red hat, Slackware, Debian, Ubuntu ...
- ▶ Available for PCs, but more used on servers, smartphones and tablets.

Install Linux

▶ **Install the operating system**

- ▶ Download the system from a server
- ▶ Burn a DVD or a CD
- ▶ Boot from this disk
- ▶ Follow the instructions (choice of the language, keyboard, users)

▶ **root**

- ▶ One user is specific: root
- ▶ Super-user
- ▶ Can do everything on the system
- ▶ Normal users can not change config files or install / configure applications

Shell

Main Functionalities

Command Shell

- ▶ **Linux can be manipulated using a Graphical interface**
 - ▶ Each distribution has its own interface
 - ▶ Quite useful for administration tasks
- ▶ **Shell : Much more useful**
 - ▶ Direct access to information
 - ▶ Clear commands (no ambiguities)
 - ▶ Standard for all Unix systems (including Mac OSX, Linux, ...)
 - ▶ There is no alternative to manage a server
 - ▶ Problem: you need to know some commands by heart.

Visit directories

- ▶ **See the content of the current directory** `ls`

```
emmanuel@emmanuel-VirtualBox:~$ ls
Desktop      Downloads      examples -php  ↘
→Pictures    Templates
Documents    examples.desktop  Music          ↘
→Public      Videos
```

La couleur permet de voir les répertoires et les fichiers.

- ▶ **Voir le répertoire courant** `pwd`


```
emmanuel@emmanuel-VirtualBox:~$ pwd
/home/emmanuel
emmanuel@emmanuel-VirtualBox:~$
```

- ▶ **Changer de répertoire** `cd`

```
emmanuel@emmanuel-VirtualBox:~$ cd Videos
emmanuel@emmanuel-VirtualBox:~/Videos$ pwd
/home/emmanuel/Videos
```

Directories arborescence

- ▶ **Files and directories form an arborescence**

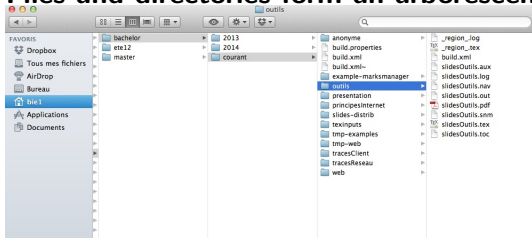

- ▶ **To visit a directory**
`cd myDirectory`
- ▶ **To visit parent directory**
`cd ..`
- ▶ **One can move many levels in one command**
`cd ../../myDirectory`

The arborescence (Cont.)

```
emmanuel@emmanuel-VirtualBox:~$ pwd
/home/emmanuel
emmanuel@emmanuel-VirtualBox:~$ ls
Desktop      Downloads      examples-php  ↘
→Pictures   Templates     Videos
Documents    examples.desktop  Music        ↘
→Public      tmp
emmanuel@emmanuel-VirtualBox:~$ cd examples-php↘
→/
emmanuel@emmanuel-VirtualBox:~/examples-php$ ls
base  basic.zip
emmanuel@emmanuel-VirtualBox:~/examples-php$ cd↘
→ base
emmanuel@emmanuel-VirtualBox:~/examples-php/↘
→base$ pwd
/home/emmanuel/examples-php/base
emmanuel@emmanuel-VirtualBox:~/examples-php/↘
→base$ cd ../../Downloads/
emmanuel@emmanuel-VirtualBox:~/Downloads$ pwd
```

Manipulate directories

- ▶ **Create a directory:** `mkdir myDirectory`
- ▶ **Copy one or many files :** `cp originalFile copyFile`
 - ▶ You can use jokers
 - ▶ * anything (many characters)
 - ▶ ? one single character
- ▶ **Remove a file:** `rm myFile`
 - ▶ The same jokers can be used
- ▶ **Remove a directory:** `rm -r myDirectory`

Directories (Cont.)

▶ Example:

- ▶ Create a directory tmp
- ▶ Visit this directory
- ▶ Copy the file basic.zip from the directory ../examples-php/ into tmp.

```
emmanuel@emmanuel-VirtualBox:~$ mkdir tmp
emmanuel@emmanuel-VirtualBox:~$ cd tmp
emmanuel@emmanuel-VirtualBox:~/tmp$ cp ../\
→examples-php/basic.zip .
emmanuel@emmanuel-VirtualBox:~/tmp$
```

Rights Management

Rights on a file

- ▶ **Each file belongs to one user and one group**

- ▶ To see the details: `ls -l` ou `ll`

```
emmanuel@emmanuel-VirtualBox:~$ ls -l
total 52
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
→21:57 Desktop
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
→21:57 Documents
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
→21:57 Downloads
-rw-r--r-- 1 emmanuel emmanuel 8445 Feb 17 ↘
→21:51 examples.desktop
drwxrwxr-x 3 emmanuel emmanuel 4096 Feb 18 ↘
→10:21 examples-php
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
→21:57 Music
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
→21:57 Pictures
drwxr-xr-x 2 emmanuel emmanuel 4096 Feb 17 ↘
```


Rights (Cont.)

▶ Different rights

- ▶ Read - r
- ▶ Write - w
- ▶ Execute - x

▶ Different users

- ▶ user owner of the file (user - u)
- ▶ users belonging to the group (group - g)
- ▶ any other user (other - o)

▶ Representation of the rights

```
rwxr-xr--  
 \ / \ / \ /  
  v  v  v  
  |  |  droits des autres utilisateurs (o)  
  |  |  droits des utilisateurs appartenant au ↘  
 →groupe (g)  
droits du propriétaire (u)
```

Change Rights

- ▶ **sudo to execute a command as the root**
- ▶ **Change Owner - chown**

```
emmanuel@emmanuel-VirtualBox:/var/www$ ll
total 8
-rw-r--r-- 1 root root 178 Feb 17 22:04 index.\
→html
emmanuel@emmanuel-VirtualBox:/var/www$ chown \
→emmanuel index.html
chown: changing ownership of 'index.html': \
→Operation not permitted
emmanuel@emmanuel-VirtualBox:/var/www$ sudo \
→chown emmanuel index.html
[sudo] password for emmanuel:
emmanuel@emmanuel-VirtualBox:/var/www$ ll
total 8
-rw-r--r-- 1 emmanuel root 178 Feb 17 22:04 \
→index.html
emmanuel@emmanuel-VirtualBox:/var/www$
```

Change Rights (Cont.)

► Change Group - chgrp

```
emmanuel@emmanuel-VirtualBox:/var/www$ ls -l
total 8
-rw-r--r-- 1 emmanuel root 178 Feb 17 22:04 ↘
→ index.html
-rw-r--r-- 1 root      root 177 Feb 17 22:01 ↘
→ index.html~
lrwxrwxrwx 1 root      root 22 Feb 17 22:16 ↘
→ phpmyadmin -> /usr/share/phpmyadmin/
emmanuel@emmanuel-VirtualBox:/var/www$ chgrp ↘
→ emmanuel index.html
emmanuel@emmanuel-VirtualBox:/var/www$ ls -l
total 8
-rw-r--r-- 1 emmanuel emmanuel 178 Feb 17 22:04 ↘
→ index.html
-rw-r--r-- 1 root      root      177 Feb 17 22:01 ↘
→ index.html~
lrwxrwxrwx 1 root      root      22 Feb 17 22:16 ↘
→ phpmyadmin -> /usr/share/phpmyadmin/
```

Change Rights (Cont.)

- ▶ **Change the rights on a file or a directory - chmod**

```
emmanuel@emmanuel-VirtualBox:/var/www$ cp index\
→.html test.html
cp: cannot create regular file 'test.html': \
→Permission denied
emmanuel@emmanuel-VirtualBox:/var/www$ cd ..
emmanuel@emmanuel-VirtualBox:/var$ ls -l
total 48
...
drwxr-xr-x  2 root root      4096 Feb 17 22:16 \
→www
emmanuel@emmanuel-VirtualBox:/var$ chmod og+w \
→www
chmod: changing permissions of 'www': Operation\
→not permitted
emmanuel@emmanuel-VirtualBox:/var$ sudo chmod \
→og+w www
emmanuel@emmanuel-VirtualBox:/var$
```

Install software

Install software

- ▶ **At the beginning of Unix**

- ▶ Download source files
- ▶ Read the documentation
- ▶ Configure system
- ▶ Install new libraries
- ▶ Compile
- ▶ Install

- ▶ **Package managers**

- ▶ You can download and install any application in one sentence
- ▶ Manages dependences automatically
- ▶ Very easy to manage software
- ▶ Automatic update of the programs (for patching management)

Install software (Cont.)

- ▶ **Install a package**

```
sudo apt-get install apache2
```

- ▶ **Remove a package**

```
sudo apt-get remove apache2
```

- ▶ **Update Package Index** for the list of available packages

```
sudo apt-get update
```

- ▶ **Update packages** for patching all the software you have (all the programs at once)

```
sudo apt-get upgrade
```

Conclusion

Conclusion

▶ **Command Line Instructions**

- ▶ It is possible to manipulate file with clicks and Drag and Drop.
- ▶ It is much easier to do it with command line instructions
- ▶ Parameters can be adjusted
- ▶ Precision is much better

▶ **Install software**

- ▶ Use package managers
- ▶ Easy to install any software
- ▶ Management of update is automatical
- ▶ Very important for security

```
?> sudo apt-get update
```

```
?> sudo apt-get upgrade
```